

VLF CR-80 kV test system

High-performance VLF test system for up to 46 and 66 kV rated cables

Megger[®]



- Test with 3 U_0 for 46 kV cables or 2 U_0 for 66 kV cables
- Can function as a stand alone system or be integrated into the Centrix Test Van
- Ideal for standard compliance testing of long cables such as submarine cables
- Reporting, breakdown recognition and leakage current measurement
- Integrated discharge system

DESCRIPTION


This high-performance 0.1 Hz VLF test system for cables with cosine-rectangular voltages works in accordance with VDE, IEC and IEEE standards.

According to most standards and regulations cable circuits must be tested after installation, after repair or for maintenance purposes. The VLF CR-80 kV test system can be used to test cables with 3 U_0 with operating voltage levels up to 46 kV. The system consists of a control unit and an HV unit. The high test capacity of 2.5 μF allows to simultaneously test all three phases with the standardized 0.1 Hz test frequency. Positive and negative DC testing of cables and connected switchgears can be carried out by switching over to DC Mode. Aside from cable and sheath testing, the system can also be used to precisely pinpoint sheath faults (in combination with a step voltage probe like the ESG NT).

Using 0.1 Hz cosine-rectangular voltage, weak spots in the cable can be safely brought to break-down. The benefits of the VLF method with 0.1 Hz cosine-rectangular voltage have been confirmed by extensive scientific research as well as practical field tests. The proven voltage is recommended by Cenelec 620/621, IEC 60502-2 and IEEE 400.2 standard.

The VLF CR-80 kV test system can be used as stand-alone system (permanently installed in a transportation container for operations such as cable testing on offshore wind-farms) or fully integrated into a test and fault location system. The integrated safety system and breakdown recognition software maximise safety.

Furthermore, the leakage current measurement enables a qualitative assessment of the cable cable, and the protocol function allows test data to be stored for further reporting purposes.

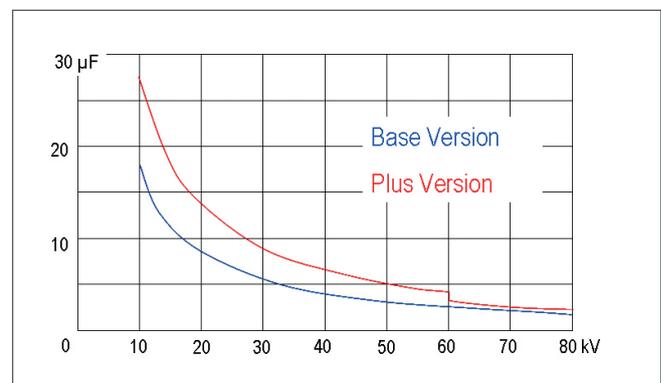

Testable capacities

TECHNICAL DATA*

VLF 80 kV

0.1 Hz VLF operation

	Base	Plus
Wave shape	Cosine-Rectangular	
Output voltage	0 ... 80 kV _{rms}	0 ... 80 kV _{rms}
Output current	0 ... 12.5 mA	12.5 mA @ 80 kV (resolution 10 µA)
Frequency	0.1 Hz	
Testable cable capacitance	2.0 µF @ 0.1 Hz and 80 kV _{RMS}	2.5 µF @ 0.1 Hz and 80 kV _{RMS}

DC operation

Output voltage	0 ... -80 kV	0 ... ±80 kV
	Integrated	

Breakdown recognition

Leakage current measurement	Integrated
-----------------------------	------------

Reporting

Reporting	Integrated
-----------	------------

Sheath fault pinpointing	0 ... 10 kV / Duty cycle 1:3, 1:5, 1:9
--------------------------	--

Input voltage	115 V / 230 V ± 10 %, 50/60 Hz, 1900 VA
---------------	---

Dimensions (W x H x D)	1350 x 1250 x 1100 (1500**) mm
------------------------	--------------------------------

Weight	380 kg
--------	--------

Protection class	IP20
------------------	------

Operating temperature	-25 °C ... +55 °C
-----------------------	-------------------

Storage temperature	-40 °C ... +70 °C
---------------------	-------------------

FEATURES

- Ideal for testing long 36/45 kV submarine cables
- High test capacity
- Maximises user safety through automatic discharge of the test object and earth loop monitoring
- Breakdown recognition
- VLF, DC and sheath fault pinpointing in one device

MAXIMUM TEST LENGTH	VLF CR-80-B	VLF CR-80-P
10 kV XLPE cable $U_t = 18 \text{ kV}_{\text{RMS}}$	Single phase 36 km Three phase 12 km	Single phase 60 km Three phase 20 km
20 kV XLPE cable $U_t = 36 \text{ kV}_{\text{RMS}}$	Single phase 18 km Three phase 6 km	Single phase 30 km Three phase 10 km
36 kV XLPE cable $U_t = 60 \text{ kV}_{\text{RMS}}$	Single phase 12 km Three phase 4 km	Single phase 18 km Three phase 6 km
45 kV XLPE cable $U_t = 78 \text{ kV}_{\text{RMS}}$	Single phase 9 km Three phase 3 km	Single phase 11 km Three phase 3,6 km
66 kV XLPE cable $U_t = 76 \text{ kV}_{\text{RMS}}$ $U_t = 2 U_0$	Single phase 10 km Three phase 3,3 km	Single phase 12 km Three phase 4 km

ORDERING INFORMATION

Product (please contact local representative or factory for detailed offer)	Order no.
VLF CR-80 basic or plus installed in a van	n.a.
VLF CR-80 basic or plus installed in a trailer	n.a.
VLF CR-80 basic or plus installed in a container (on-/offshore)	n.a.

* We reserve the right to make technical changes; **Depending on position of HV output

SALES OFFICE
Megger Germany GmbH
Dr.-Herbert-Iann-Str. 6,
D-96148 Baunach
T +49 9544 68-0
E team.international@megger.com

VLF CR-80_DS_EN_V02
www.megger.com
ISO 9001
The word 'Megger' is a registered trademark

Megger[®]